


PDP 21,5W

High Performance Broadcast LC Display

hd2Line PRO

HD2line Pro represents the newest generation Broadcast LC Displays, utilizing state-of-the-art video and audio processing hardware combined with the most precise LC Display Technology available today. Optional a multi-format 3G/HD/SD-SDI input with an optional Fiber Optic Module supports data rates up to 3Gb/s and accepts SD-SDI, HD-SDI, optional Dual-Link HD-SDI, and 3G-SDI. Accepted signal formats amongst others : 480i/29.97, 576i/25, 720/50p and 720/60P, 10-bit/12-bit RGB 4:4:4, 1080psf/23.98, 1080p/23.98, 1080psf/24, 1080p/24, 1080psf/25, 1080p/25, 1080i/25, 1080psf/30, 1080p/30 and 1080i/30(29,97), 10-bit 4:2:2 1080p/50 and 1080p/60(59,94). Multiple analog and digital audio I/O modules complement the range of available options, including discrete analog or digital Inputs and de-embedded audio outputs .

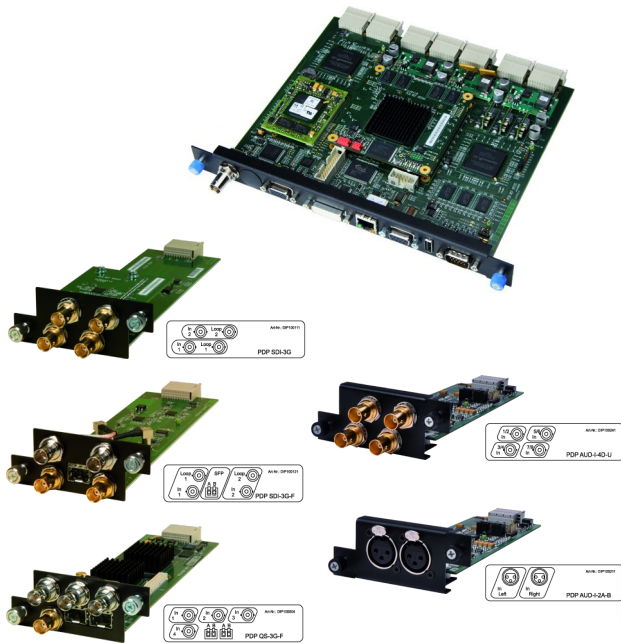

PDP 21,5W - Product Highlights at Glance

- Ultimate picture quality
- Outstanding gray scale and color depth through a 16 bit panel driver
- Number of colors displayed: 16.67 million colors (RGB - 8 bits each)
- Perfect and repeatable color matching between monitors
- Multiple color gamuts
- Precise picture uniformity and stability
- Multi-format signal support – freedom to operate in whichever format you work
- Automatic aspect ratio and mode identification
- 1:1 pixel mapping
- Perfect motion interpolation for interlaced signals
- VITC/ATC timecode display
- NTP (network time protocol) driven realtime display
- WSS/AFD indicator
- DCS 3 remote control software
- Centralized monitor wall control via Ethernet
- Dolby indicator
- 8 channel audio level meter
- Selectable color temperature 3200K, 5400K, 6504K, 9300K
- Color component display modes: all, red-, green-, blue-only, monochrome
- Dynamic and static IMD support
- Tally support via GPI and VGPI (network)
- Programmable GPI control
- Safe area and safe title
- Built-in screensaver to minimize sticking
- Built-in diagnostic and test pattern generator
- Rugged, durable design
- No fans - no noise
- Optional wide range of input formats: analog and digital up to 3 Gb/s
- Optional Dual Link SMPTE 372M, SMPTE 424M
- Optional 3D-Mixer
- Optional Loudness
- Optional Fiber optic input
- Optional Quad Split (optional 4K support)

Technical Specifications

General

Model	PDP 21,5W
Type Multiformat HDTV	LCD Monitor - 8 bit panel
Screen Size	21,5" wide format
Aspect Ratio	16:9
Native Resolution	1920 x 1080 pixels
Effective Screen	475.20 mm (H) x 267.30 mm (V)
Display Colors	16.67 million
Brightness / max. Brightness	80, 90, 95, 100 conform to EBU, User selectable / 250 cd/m²
Contrast Ratio	1000:1
Response Time	14 ms (gray to gray)
Viewing Angle	H-178° / V-178°
H Frequency	31.400 kHz - 75.000 kHz
V Frequency	50 Hz / 60 Hz

Color Space / Gamma / Motion Adapt.

Color Space	HDTV (ITU-R BT.709); SDTV (ITU-R BT.601)
Color Temperature	Presets 3200 K / 5500 K / 6504 K / 9300 K
Gamma Correction	10 bit gamma correction 1.0, 1.5, 2.0, 2.2, 2.35, 2.5 conform to EBU spec., User
Motion Adaption	5-line superadaptive 2D comb filters
Scaling	Native / 4:3 / 16:9 / Full screen / WSS / AFD / User

Input / Output Terminals


Video 1	Composite Video / BNC / 1 Vss - 75 Ohm
DVI-I	DVI-I (single link) up to 1920x1200@60Hz including DDC1 EDID support
VGA	RGB / 15pin Sub-D, 0.7 Vss - 75 Ohm
Optional 3G/HD/SD-SDI (up to 4 inputs)	SMPTE 424M (3 Gb/s) SMPTE 292M / ITU-R BT.656 / SMPTE 295M
Optional Fiber optic modul (up to 4 inputs)	SMPTE 297M - 1260-1620 nm, LC/PC (female), single mode, -23 dBm sensitivity

External Control

Ethernet Network	Remote control, color alignment, dyn. IMD and Tally / RJ-45 8pin
RS 232	Remote control / 9pin Sub-D (female)
GPI	Static IMD and Tally, function key / 15pin Sub-D (male)

Electrical / Mechanical

Operating Temperature	5 °C - 45 °C
Power Requirement	AC 100 - 240V, 50/60 Hz
Power consumption min (± 5% tolerance)	24W
Power consumption typ (± 5% tolerance)	31W
Power consumption max (± 5% tolerance)	44W
Dimensions (Width x Height x Depth)	503.1 mm x 311.0 mm x 113.8 mm
Weight excluding Mounting (± 3% tolerance)	5.10 kg
Mounting	MIS-D, 100, M4 x 10, C
Color	RAL 9005 Black

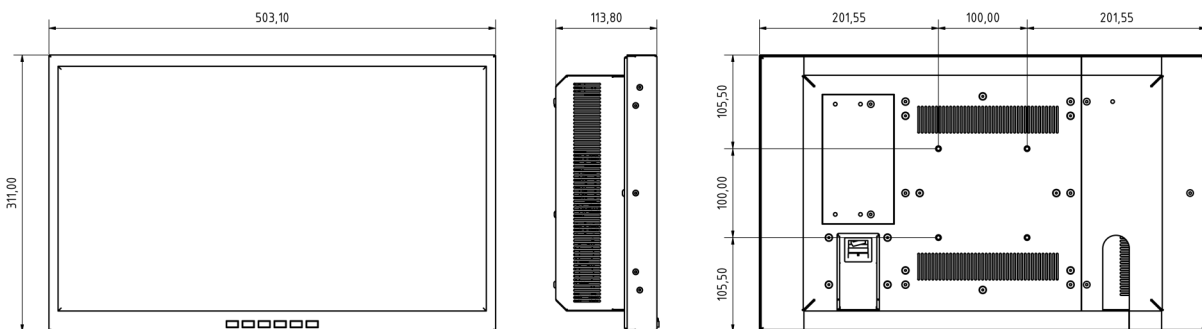

sonoVTS GmbH
Headquarter
Kapellenstrasse 11
D-85622 Feldkirchen / Munich
fon +49 89 419671 - 0
fax +49 89 419671 - 96

sonoVTS GmbH
Production facility
Am Königsholz Ost 4
D-85411 Eglhausen
fon +49 89 419671 - 0
fax +49 89 419671 - 996

Salesoffice Cologne
Am Coloneum 1
Bauteil B
D-50829 Cologne
fon +49 221 250370 - 0
fax +49 221 25036 - 66

sono Broadcast GmbH
Hallwanger Landesstrasse 6
A-5300 Salzburg / Hallwang
fon +43 662 668625 - 5
fax +43 662 668625 - 6


sonovts
BROADCAST